



## MR<sup>®</sup> 90 UV-YokeR



### Product characteristics

- Power supply through integrated electronics in MR<sup>®</sup> 50 hand yoke
- Mountable on MR<sup>®</sup> 50 hand yoke
- Homogeneous light distribution of approx. Ø 120 mm (at a distance of 10 cm)
- With MUG 2 filter

### Technical data


Art. No.:	336
UV-LED, risk class acc. to DGZfp/BGFE EM 6:	2
Weight:	60 g
Dimensions:	L = 55 mm, B = 26 mm, H = 26,5 mm
Max. Clamping size:	50 x 50 mm
Wavelength:	365 nm ± 5 nm
UV LED lifetime:	> 5.000 Std
Waste heat:	< 30°C
Light distribution:	Distance 10 cm: approx. 120 mm
UVB:	0 W/m <sup>2</sup>
UVA:	Distance 10 cm: > 25 W/m <sup>2</sup> Distance 5 cm: > 70 W/m <sup>2</sup>

\*\*Technical changes reserved!\*\*



## MR<sup>®</sup> 90 UV-YokeR

### Spectrum (Spectral Distribution)

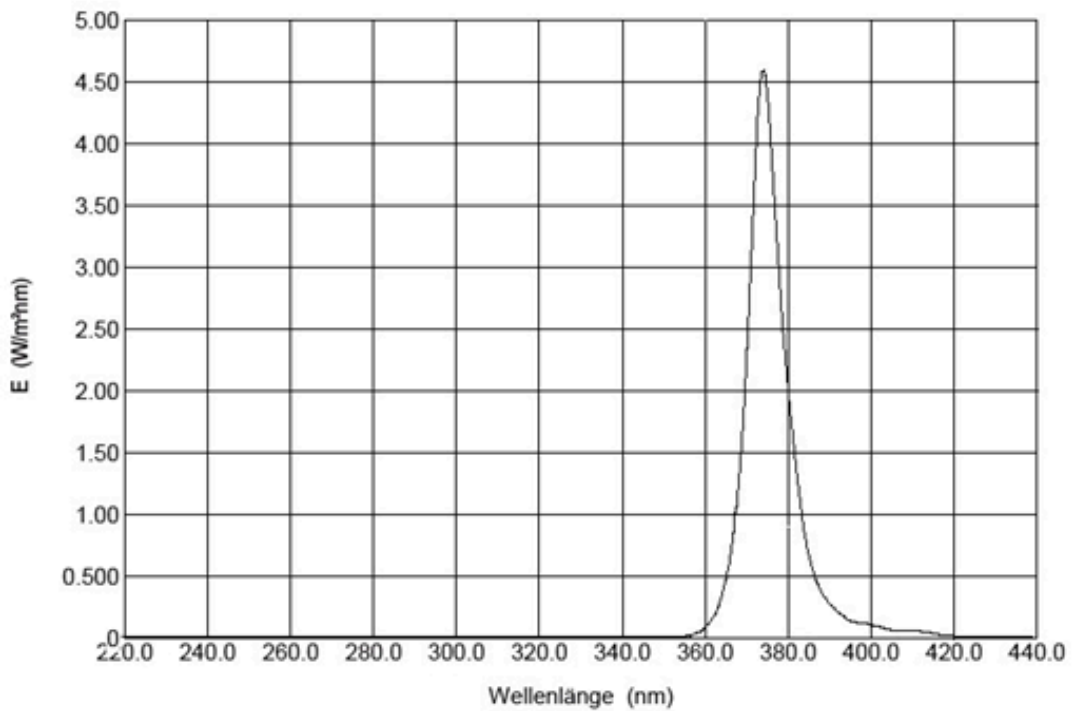

\*\*Technical changes reserved!\*\*