

**REFLECON® Tarnish 11 Type 1 - Sublimating**



**SUBLIMATING**



**11**  
**500 ml**

**PRODUCT CHARACTERISTICS**

 **≈ 1-3 h**


- Sublimation time depending on object material & surface and ambient temperature
- Suitability for plastics - single-component lacquer and primer needs to be tested prior to using
- No post-cleaning of the objects
- No dust residue while spraying → protects the fan of the laser equipment
- Wood compatible
- Spray distance 15 – 20 cm
- Solvent based
- Declaration acc. to GHS
- Odor reduced
- Suitable for uncoated objects and 2-component lacquer
- Very good, thin and uniform spray pattern
- Very good adhesion and removability of marker points

**NOTICE**

Clean surface completely before use (e.g. from dust). As soon as the surface is dry, it can be touched - **REFLECON® Tarnish** will then no longer smear. Very good adhesion and removability of the marking points in the applied film – with an average layer thickness.

Minimum shelf life: 3 years at storage temperature ( 5 – 45 °C ) for aerosol can. The state of aggregate changes at a temperature below 5 °C. When the temperature rises above 5 °C, the state of aggregate will normalize.

Available in aerosol can, 500 ml (12 cans/box).

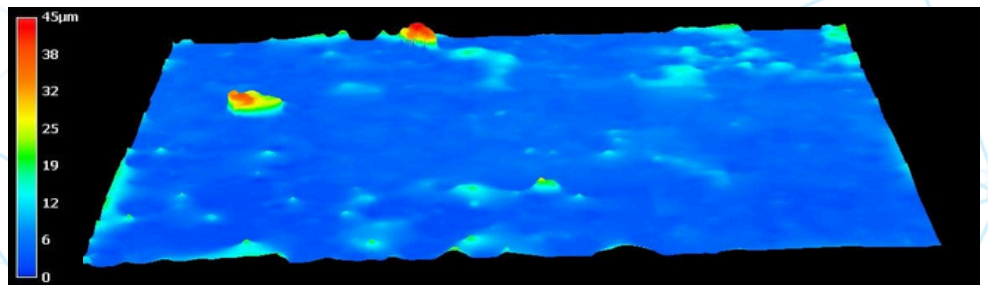

**MICROSCOPIC IMAGE OF A SPRAY LAYER**

\*\*technical changes reserved!\*\*

