

REFLECON® Tarnish 12 Type 1 - Sublimating



SUBLIMATING

12
500 ml

PRODUCT CHARACTERISTICS ⌚ ≈ 1-2 h


- Sublimation time depending on object material & surface and ambient temperature
- Especially suitable for single-component lacquer
- No post-cleaning of the objects
- No dust residue while spraying → protects the fan of the laser equipment
- Spray distance 5 - 10 cm
- Solvent reduced
- Declaration acc. to GHS
- Odor-reduced
- Suitable for coated and uncoated objects
- Very good, thin and uniform spray pattern
- Very good adhesion and removability of marker points

NOTICE

Clean surface completely before use (e.g. from dust). As soon as the surface is dry, it can be touched - REFLECON® Tarnish will then no longer smear. Very good adhesion and removability of the marking points in the applied film - with an average layer thickness.

Minimum shelf life: 3 years at storage temperature (5 - 45 °C) for aerosol can. The state of aggregate changes at a temperature below 5 °C. When the temperature rises above 5 °C, the state of aggregate will normalize.

Available in aerosol can, 500 ml (12 cans/box).

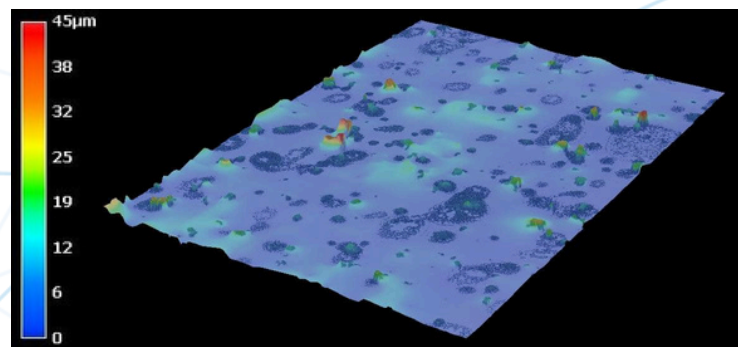

MICROSCOPIC IMAGE OF A SPRAY LAYER

technical changes reserved!

