


MR[®] 765 RF

**Magnetic powder suspension
red and fluorescent**

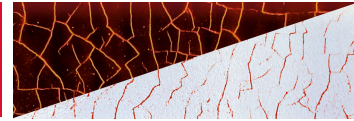

Product characteristics

- Ready-to-use magnetic particle suspension for magnetic particle testing
- Red crack indication in daylight & UV light
- Oil based
- Very high sensitivity for finest defects
- Settling volume (1h) 0.6 - 0.8 ml / 100ml
- Average particle size da 3-7 µm

Minimum shelf life / temperatures

Aerosol / Bulk:
3 years at storage temperature
Storage: + 5 °C - + 45 °C
Application: + 10 °C - + 50 °C



Approvals / Conformities

- EN ISO 9934-2



Further information

Process description according to EN ISO 9934-1 on request or on www.mr-chemie.de/en. For further information see Material Safety Data Sheet and certificate 3.1. For additional equipment please visit our Homepage or contact our sales team.

Suggested products

Cleaner:	MR [®] 71, MR [®] 79, MR [®] 85 MR [®] 88, MR [®] 3001, MR [®] 3002
Contrast paint:	MR [®] 72, MR 72 AF, MR 72 LS, MR [®] 725, MR [®] 726, MR [®] 727
Test block:	Reference test block 1, Reference test block 2, Test block
Measuring device:	Magnetic field strength meter, UVA/Lux, Luxmeter
Hand magnet:	MR [®] 50, MR [®] 56
UV light:	MR [®] 975, MR [®] 96 D, MR [®] 96 DSL

Delivery forms



Technical changes reserved!